The following procedure is for users who have upgraded their devices to iOS7 and resolves any Compass Control issues you have encountered since updating to iOS7. This procedure will be necessary for all Compass Control projects with iOS7 devices, going forward.

Please note:

- The iOS device and computer running Compass Navigator must be on the same network. The network must have an IP address of 192.168.xxx.xxx.

- The only iOS device that should be connected to the network is the one on which you want to generate a Device ID.

- You must disable any firewalls/Internet security.

To Generate a Device ID:

1- Update the iOS Compass App to the latest version

2- Download and install the latest version of Compass Navigator
3- Create a new project and add iPad/iPod or edit project that is using the iPad(s) in question
4- Go to iPad Properties and click on ID Generator, you will get the “Navigator Key”

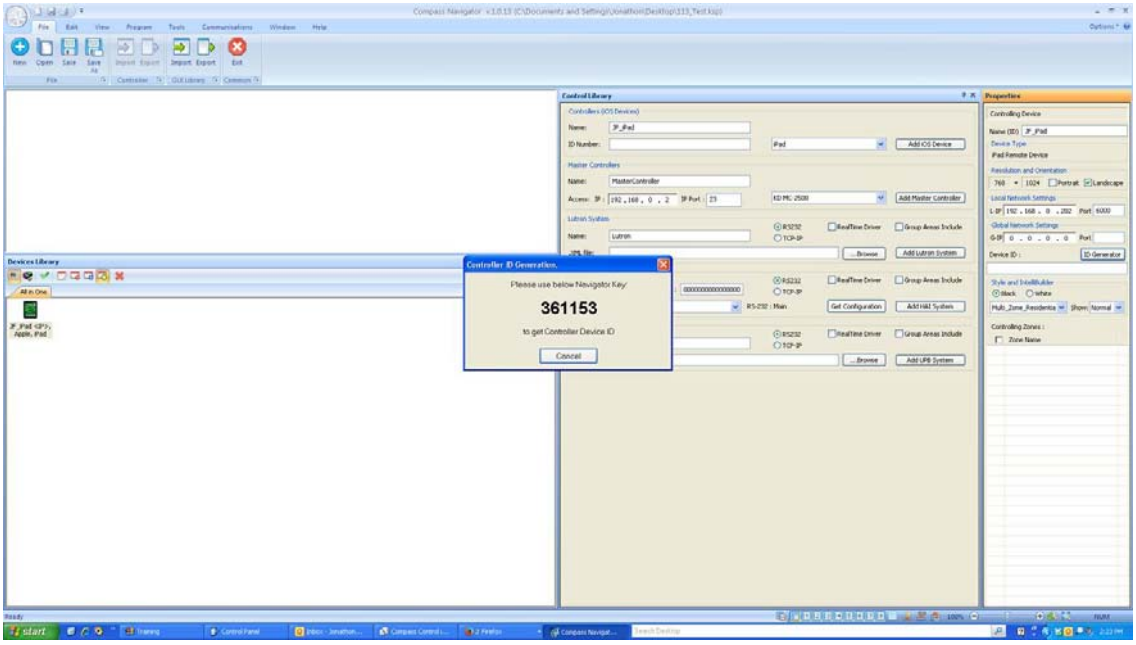

5- On the iPad go to Registration
6- Press “Get Device ID”

7- Type in the “Navigator Key” generated in Compass Navigator and press OK

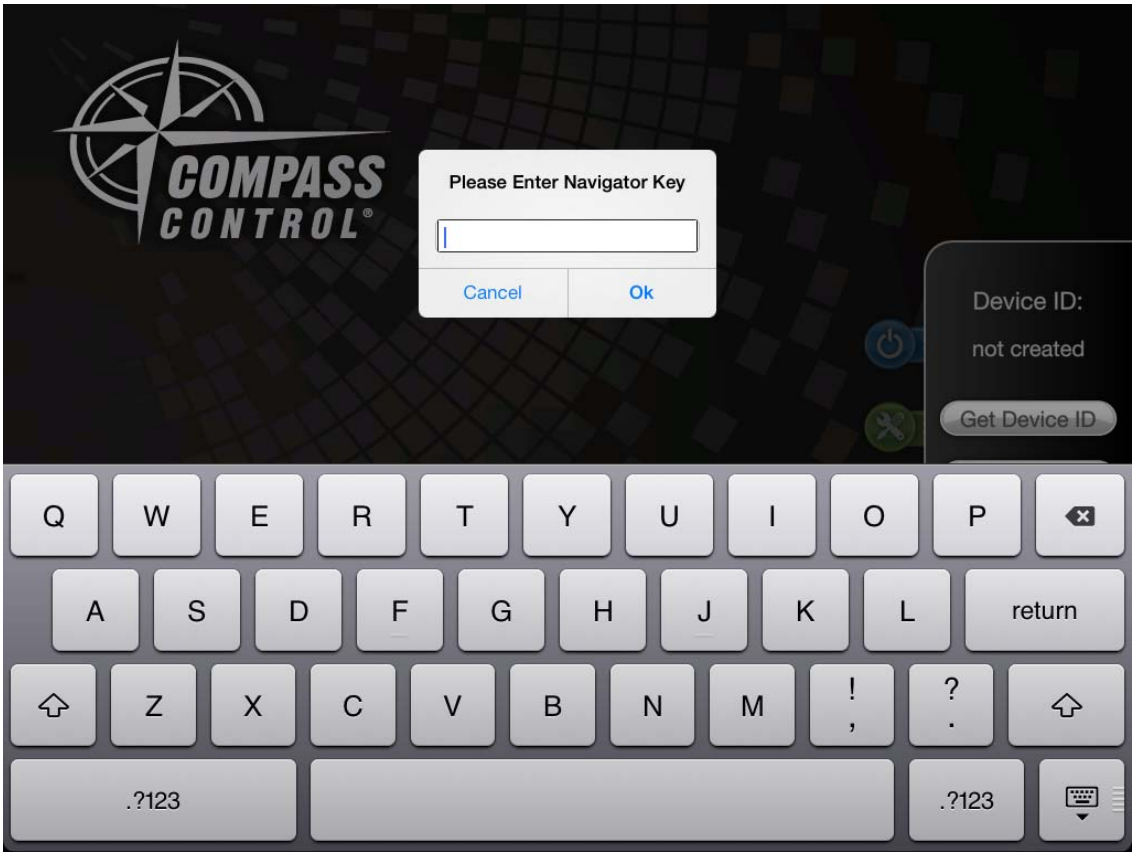

8- The Device ID will show in both iPad and Compass Navigator.

COMPASS CONTROL
Device ID:
633D804C17BA
Get Demo
Registrat
Update Project
Key digital

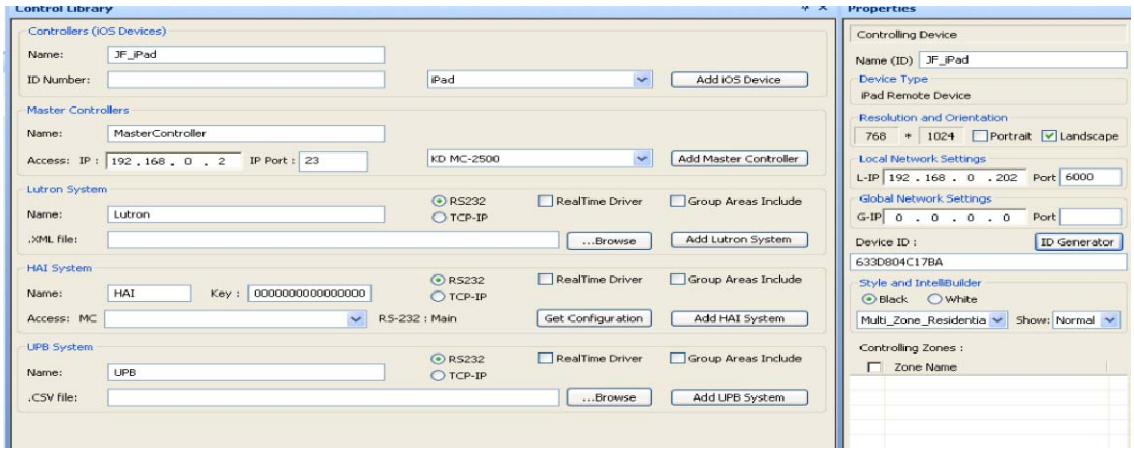
Control Library
Controllers (iOS Devices)
Name: JF_iPad
ID Number:
iPad
Add iOS Device
Master Controllers
Name: MasterController
Access: IP : 192 . 168 . 0 . 2
IP Port : 23
KD MC-2500
Add Master Controller
Lutron System
Name: Lutron
RS232
TCP-IP
RealTime Driver
Group Areas Include
.XML file:
...Browse
Add Lutron System
HAI System
Name: HAI
Key : 0000000000000000
RS232
TCP-IP
RealTime Driver
Group Areas Include
Access: IMC
RS-232 : Main
Get Configuration
Add HAI System
UPB System
Name: UPB
RS232
TCP-IP
RealTime Driver
Group Areas Include
.CSV file:
...Browse
Add UPB System
Properties
Controlling Device
Name (ID) JF_iPad
Device Type
iPad Remote Device
Resolution and Orientation
768 * 1024
Portrait
Landscape
Local Network Settings
L-IP 192 . 168 . 0 . 202
Port 6000
Global Network Settings
G-IP 0 . 0 . 0 . 0
Port
Device ID :
ID Generator
633D804C17BA
Style and IntelliBuilder
Black
White
Multi_Zone_Residentia
Show: Normal
Controlling Zones :
Zone Name